

Installation Instructions

Aubrey Chandelier 105010 & 105011

A408

Page 1 of 2

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

To Install the Canopy (Figure 1)


Component Parts

A	Ground Screw	F	Loop Collar
B	Crossbar	G	Canopy Loop
C	Lock Nut	H	Fixture Loop
D	Nipple	I	Chain
E	Canopy		

Caution: Be sure power is off at the main breaker box prior to installation

1. Carefully unpack the fixture from the carton.
2. Screw nipple (D) into canopy loop (G).
3. Spin nut (C) and crossbar (B) onto nipple (D).
4. Using two machine screws (not provided), fasten the crossbar (B) to the electric box.
Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.
5. Adjust the length of threaded nipple (D) in crossbar (B) so that loop collar (F) will hold canopy (E) against the ceiling with no threads showing on the canopy loop (G) for best appearance. Make sure the smaller diameter side of canopy ring is oriented up toward the canopy. When the correct adjustment is established, tighten lock nut (C) against crossbar (B) to hold adjustment.

6. Remove the crossbar (B) assembly from electrical box.
7. Attach one end of the chain (I) to the fixture loop (H). Lace the wires through every other link of the chain (I) to the end. Slip wires and chain (I) through loop collar (F), and canopy (E). Fasten the chain (I) to the canopy loop (G).
8. Slip wires through the canopy loop (G) and nipple (D). Make sure to provide enough slack in the wire to ensure weight of fixture is supported by the chain (I).
9. Using two machine screws (not provided), reattach the crossbar (B) to the electric box.
10. Using suitable wire connectors (not provided) connect fixture wires to supply wires (white to ribbed side of the fixture cord, black to smooth side). Run a pigtail lead from crossbar ground screw (A) to the junction box and connect all ground wires (bare copper or green to bare copper or green).
Caution: Make sure wire connectors are twisted on securely, and no bare wire is exposed.
11. Raise canopy (E) to the ceiling and secure loop collar (F) to canopy loop (G).
12. Follow instructions on next page to install glass.

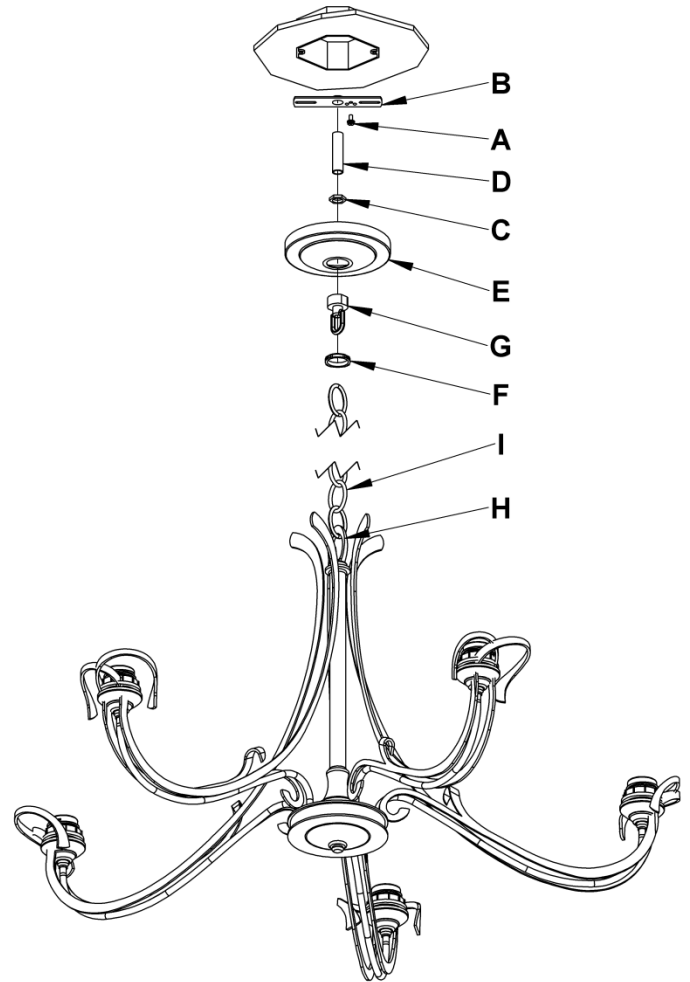

(Figure 1)

Installation Instructions

Aubrey Chandelier 105010 & 105011

A408

Page 2 of 2


(continued)

To Install Opaque Glass (105010) (Figure 2)

Component Parts

- J Retaining Ring (5)
- K Glass (5)
- L Socket (5)
- M Socket Tool

1. Remove retaining ring (J) from socket (L). *Retaining Rings are shipped installed.*
2. Place glass (K) over socket (L).
3. Replace retaining ring (J) and tighten with socket tool (M) to secure glass. *Do not over-tighten.*
4. Install light bulbs.
5. Restore electricity at the main breaker.

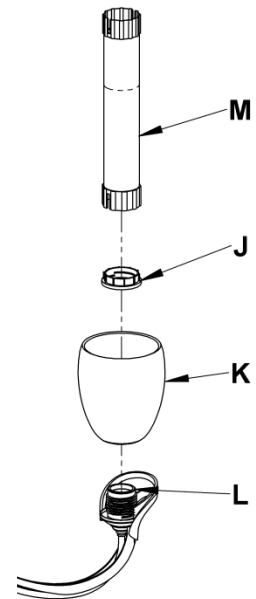

(Figure 2)


To Install Water Glass (105011) (Figures 3 & 4)

Component Parts

- J Retaining Ring (5)
- K Glass (5)
- L Socket (5)
- M Retaining Ring Cover (5)

Note: retaining ring covers (M) are shipped installed on retaining rings (J).


1. Remove retaining ring cover (M) and ring (J) from socket (L). *Retaining Rings and Covers are shipped installed on the socket.*
2. Place glass (K) over socket (L).
3. Replace retaining ring and cover (J,M) and tighten to secure glass. *Do not over-tighten.*
4. Install light bulb.
5. Restore electricity at the main breaker.

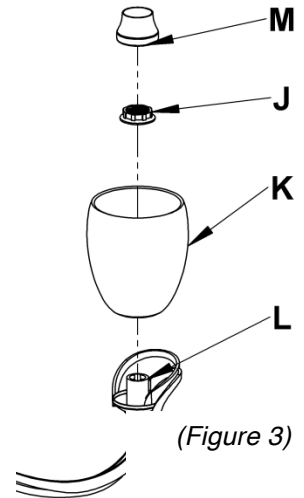

(Figure 3)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

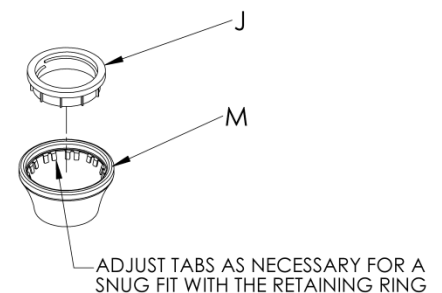

(Figure 4)