

Glass Installation Instructions



Pluto Table Lamps 27-4120

To Install Bulb & Glass (Figures 1 & 2)

Component Parts

- | | |
|------------------------------|---------------------|
| A Fixture | F Rubber Washer (2) |
| B Socket | G Nut |
| C Glass | H Cap |
| D Screw (2 Lengths provided) | |
| E Steel Washer (2) | |

1. Carefully unpack the lamp from the carton.
2. Unthread cap (H) from screw (D).
3. Remove nut (G), first steel washer (E), and first rubber washer (F) from screw (D). Save for later use. *Parts ship installed.*
4. Slip screw (D) with steel and rubber washer (E&F) up through hole in glass (C).
5. Slide remaining rubber washer (F) onto screw (D) followed by steel washer (E). Thread nut (G) onto screw (D) and tighten. (Figure 1) **Note: Due to thickness variation in the glass a second longer screw has been provided with your fixture to swap out if needed with the original screw removed from the cap.**

Note: Be sure not to over tighten the nut.

6. Install bulb. (not included) *Bulb is included with the "C" version.*
7. Tilt glass (C) over bulb. Slide screw (D) up through hole in top of fixture (A). Thread cap (H) onto end of screw (D) to secure glass (C). (Figure 2)

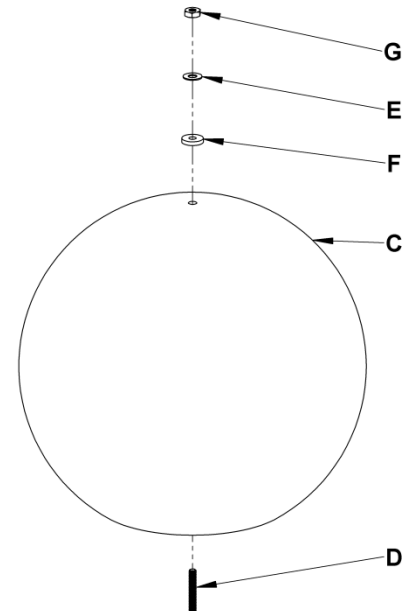


Figure 1

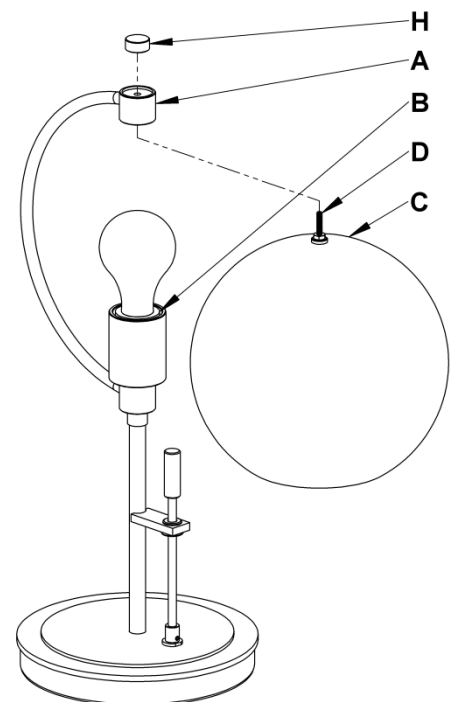


Figure 2

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

HUBBARDTON FORGE®

Hand-Forged, Vermont-Made Lighting and Accessories
154 Route 30 South, Castleton, Vermont 05735

31616 Rev A