

Glass Installation Instructions

Erlenmeyer Floor Lamp 247810 & 247810C



To Install Bulb & Glass (Figure 1)

Component Parts

- A Fixture
- B Pin
- C Glass
- D Thumbscrews (4)

1. Carefully unpack the lamp from the carton.
2. Install bulb into socket. *Bulb is included with the "C" version only.*
3. Loosen thumbscrews (D) . It is not necessary to remove thumbscrews.
4. Slip glass (C) into ring aligning groove in glass with thumbscrews (D) and tighten thumbscrews (D). Do not overtighten.
5. Glass maybe be rotated to a variety of angles. While holding glass, remove pin (B) and orient glass into desired position. Replace pin (B) thru tab and engage with gear.

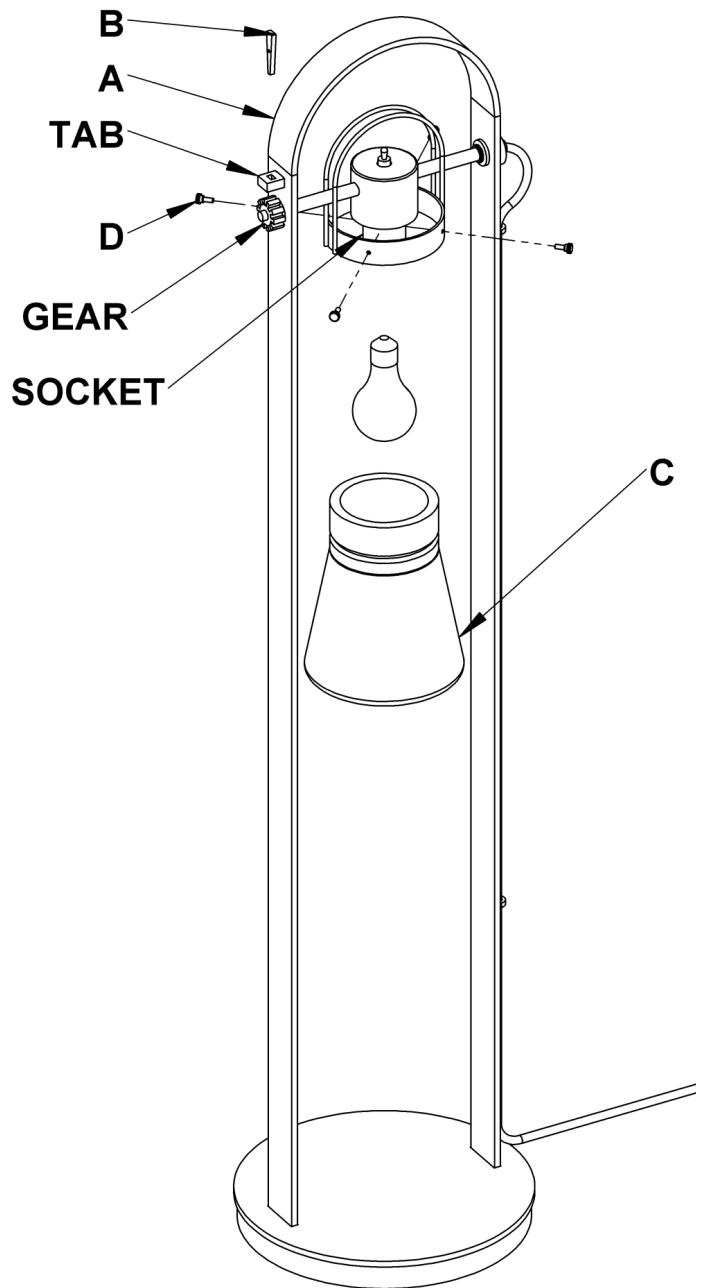


Figure 1

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.